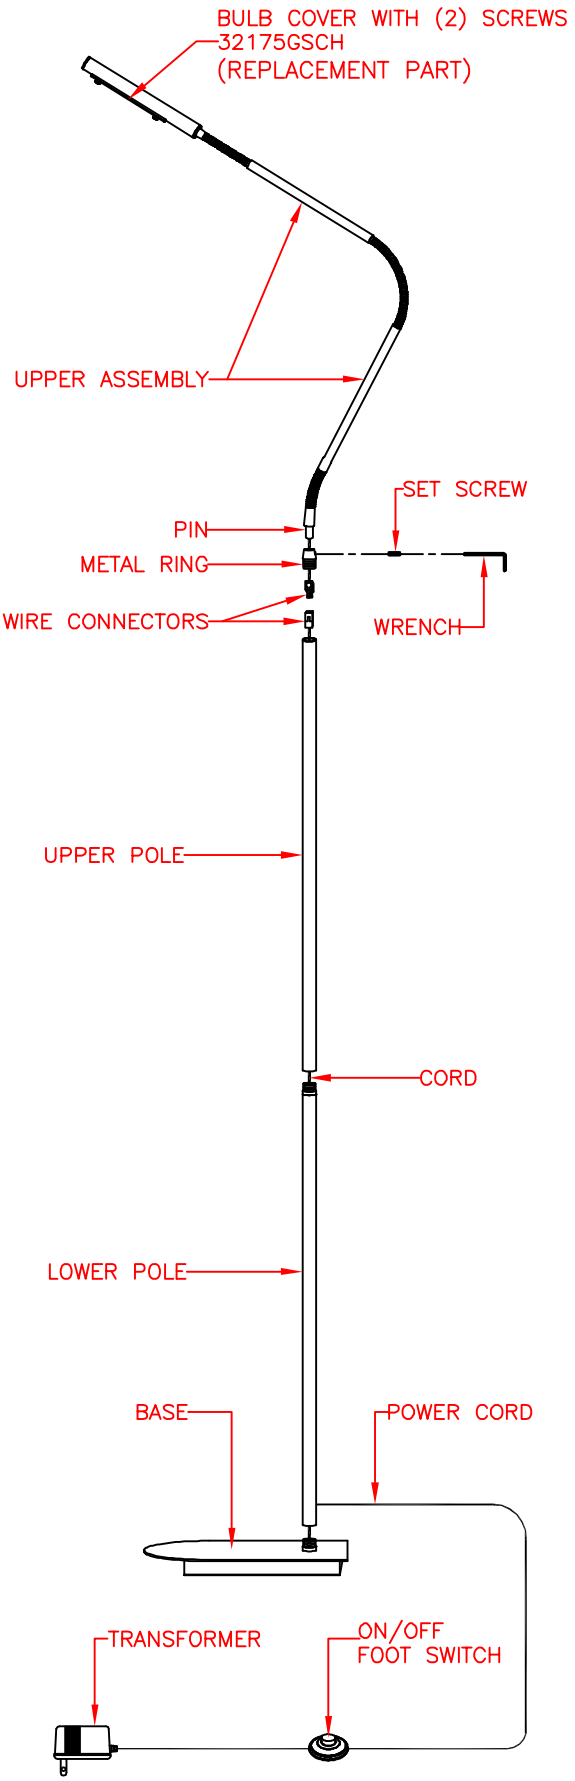

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS LAMP SHOULD TAKE APPROXIMATELY 10 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

UNPACK THE LAMP

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS IN THE PACKAGE: UPPER ASSEMBLY, METAL RING, SET SCREW, WRENCH, UPPER POLE, LOWER POLE, BASE AND TRANSFORMER. TO PROTECT THE FINISH, PLACE ALL PARTS ON A SOFT SURFACE.

ASSEMBLE THE LAMP

1. CAREFULLY ORGANIZE AND PLACE ALL PARTS ON A SMOOTH, FLAT SURFACE. LINE UP ALL OF THE PARTS ACCORDING TO THE ASSEMBLY DIAGRAM.

2. SCREW LOWER POLE TO TOP OF BASE.

3. PASS CORD FROM LOWER POLE THROUGH UPPER POLE AND SCREW UPPER POLE THE TOP OF LOWER POLE.

4. JOIN THE WIRE CONNECTORS TOGETHER.

5. SCREW METAL RING TO TOP OF UPPER POLE.

6. INSERT PIN OF UPPER ASSEMBLY INTO THE HOLE IN METAL RING, THEN SECURE WITH SET SCREW. (WRENCH INCLUDED)

7. PLUG THE TRANSFORMER INTO AN OUTLET AND TURN ON AT SWITCH.

TROUBLE SHOOTING

1. IF YOUR LAMP DOES NOT LIGHT, CHECK PLUG AT THE OUTLET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE POWER OUTLET.

2. IF THE LAMP STILL DOES NOT LIGHT, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

AVAILABLE PART IS:
32175GSCH (BULB COVER WITH TWO SCREWS)